


Gates Pump Station and Forcemain

Gates, New York

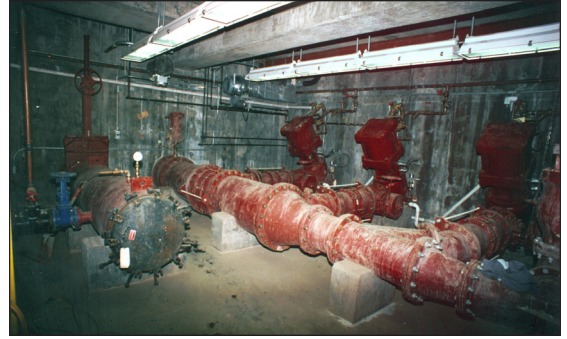

Bell was responsible for the construction of this sewage booster pump station that included three 14-inch diameter submersible pumps, 200 linear feet of 24-inch diameter forcemain, 300 linear feet of 42-inch diameter RCP gravity sewer, and 1,000 linear feet of six-inch diameter water main.

Building construction consisted of structural concrete below grade and block with brick veneer above grade. The project also required blacktop road and parking lot construction.



Client MonroeCountyPureWaters District

Owner MonroeCountyPureWaters District

Contract Value \$1.5 million

Contract Type Firm Fixed Price

Architect/Engineer Malcolm Pirnie, Inc.